

Telephone Interface



Our telephone interface units enable staff to make public address announcements from their own desk telephone.

The free-standing units act as an interface between the analogue telephone system and the amplifier.

FEATURES:

- Operated by simply dialing the BT5/BT8 extension number.
- Each unit is supplied with an IEC mains lead.

BT5 unit:

- Connect to a telephone extension socket and the public address amplifier.
- Fully approved by BT (approval number S/2455/3/H/452969).
- The BT5 will provide the user with an acknowledge tone, followed by a chime (optional OPT33 fitted). A live broadcast announcement can then be made.
- Upon completion of the broadcast the BT5 will disconnect from the PA system and release the telephone extension ready to accept another call.
- Outputs are selectable from line or microphone level.
- Priority level control available.


BT8 unit:

- Can be used to broadcast live announcements.
- Additional facility enables the user to pre-record an announcement. This reduces the risk of feedback where the telephone is adjacent to a loudspeaker.

- When connected to a telephone system with MF signalling, the BT8 enables the user to select up to eight zones via the telephone keypad.
- An internal selector determines if the recorded message is played once or twice.
- Can be wired into any two-wire analogue extension port via a designated master extension socket. Another option is to connect the unit to the paging port available on most modern telephone switches. However, they are not designed to operate on keyphone system extension ports.
- Outputs are selectable from line or microphone level.
- Signal output and zone select connections are via a 25 way D connector.
- Compatible with our BDM300 range of desk microphones (connected via the BMS25 socket box supplied with the microphone).
- We recommend using our B8IR relay unit for the zone select switching.
- Please note: the BT8 is not approved for direct connection to the BT network. Under general approval NS/G/23/J/100003 it may be connected to a port on a telephone switch (PABX). This unit should only be used with a switchable amplifier input.

Specifications:

	BT5	BT8
Ring voltage	11V @ 50Hz	20-70V @ 17-25Hz
REN value	1.0	
Mic output level	5mV @ 22 ohms	2.5mV @ 22 ohms
Line output level	0dBm @ 600 ohms	0dBm 775mV @ 220 ohms
Engaged tone	600 Hz, 250ms on - 250ms off, -13dBm	n/a
Acknowledge tone	600 Hz, 2 sec @ -13dBm	n/a
Tone level to line	-13dBm	n/a
Min line level to hold	30mA	n/a
Cleardown by either of the following		
Time out delay	normal 28 sec - engaged/busy 8 sec	recorded 55 sec - live 2.5 mins
K break	n/a	interruption of line current
Voice operated switch	absence of caller speaking	
DTMF tone	n/a	sent from caller to terminate the call
Audio connections		
Zone select outputs	n/a	8 x NPN open collector 40V @ 100mA max
Amplifier access output	1 x NPN open collector 40V @ 100mA max	
Amplifier busy input	connects to 0V via amp busy	opto-coupled 12-30V 7mA max AC/DC
General		
Supply input	220-240V, 50Hz	220-240V, 50/60Hz
Fuse protection	50mA (F) 250mA (T)	20 x 5mm 250mA (T)
Dimensions mm W x H x D	270 x 122 x 70	

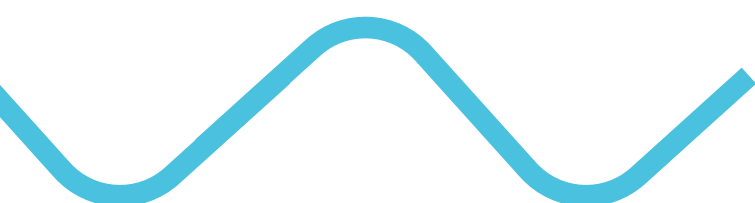

BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom

T: +44 (0) 1892 664422 F: +44 (0) 1892 663146
E: mail@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk