



OmniCALL

BENEFITS & FEATURES:

- Red, green, stainless steel and custom finishes available
- Push door
- Braille
- Luminescent labelling
- Loop or radial connection
- T-Coil in handset
- Separate indication for refuge or fire telephone incoming call on Master Station
- Provides two-way, hands free, full duplex speech (fire telephone only) and speech steered communication (disabled refuge remote only)
- Assistance alarms have a separate indication on the master station
- Monitored external beacon option
- Local speaker, more options available
- Reset via outstation button push

Combined Unit Red / Green

Compliant to BS5839-9:2021

The OmniCALL system offers a choice of outstation units which can be wired on the same loop from the control panel.

The OCCCRP combined fire telephone and disabled refuge unit is one of the options available on this versatile system.

Click for more, including links to 'How to' Videos & Guides and related products.


Maintenance Service Contracts Available:

Complimentary Maintenance Log Book Available:

EVC System Maintenance Log Book

SPECIFICATIONS:

Combined Fire Telephone & DRS	
Product code (push door)	OCCCRP
Power supply	15-36V
Power consumption	30mA @ 24V
Humidity range	0-90% non-condensing
Temperature range	-5°C to +40°C
Indicators	Status
Finish	RAL 3020 & RAL 6024
Dimensions mm W x H x D	130 x 395 x 80
Bezel dimensions mm	170 x 435
Bezel cutout mm	138 x 403
Knockouts/cable entry points	20 mm

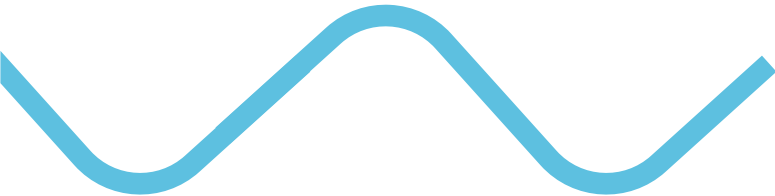

BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk