

Type A outstation



Fire Telephone

Designed to meet BS5839-9:2021 & BS8893:2024

The OmniCALL system offers a choice of outstation units which can be wired on the same loop or via radials from the control panel.

The OCAFR red fire telephone unit is one of the options available on this versatile system.

[Click for more, including links to 'How to' Videos & Guides and related products.](#)

OmniCALL

BENEFITS & FEATURES:

- Red, green, stainless steel and custom finishes available
- Push door
- Surface mount as standard, bezel required for flush mounting (Product code OCAFR-BZ)
- Full duplex speech
- Luminescent labelling
- Loop or radial connection
- Local speaker
- T-coil in handset
- Assistance alarms have a separate indication on the master station
- Monitored external beacon option
- Fully addressable
- Conference call facility between multiple fire telephones is available via the operator at the control panel. Up to 4 concurrent units (4 outstations and operator).
- Calls are initiated upon opening the door.
- Self powered from loop or radial.

PRODUCT CODES:

- OCAFRP - Push door
- OCAFR-BZ - Bezel




Maintenance Service Contracts Available:

Complimentary Maintenance Log Book Available:

EVC System Maintenance Log Book

SPECIFICATIONS:

Fire Telephone – push door, red	
Product code	OCAFRP
Power supply	15–36V
Power consumption	30mA @ 24V
Humidity range	0–90% non-condensing
Temperature range	–5°C to +40°C
Indicators	Status
Finish	RAL 3020
Dimensions mm W x H x D	130 x 350 x 80
Bezel dimensions mm W x H	170 x 390
Bezel cutout mm W x H	138 x 358
Knockouts/cable entry points	20 mm

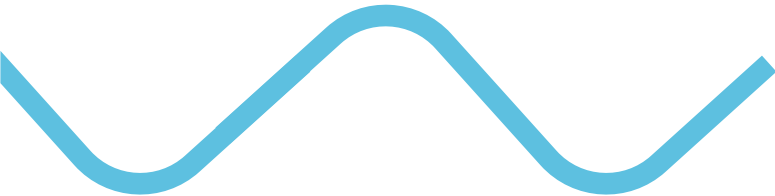

BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk