



Advanced Refuge Remote

Designed to meet BS5839-9:2021 and BS8893:2024

The OmniCALL system offers a choice of outstation units which can be wired on the same loop or via radials from the control panel.

The OCBARG green advance refuge remote is one of the options available on this versatile system.

Click for more, including links to 'How to' Videos & Guides and related products.

OmniCALL

BENEFITS & FEATURES:

- Surface mounted as standard or flush mounted via bezel
- Braille
- Luminescent labelling
- Loop or radial connection
- Provides two-way, hands free, half duplex speech
- Induction loop
- Assistance alarms have a separate indication on the master station
- Reset via outstation button push
- No local power required for any outstation, including emergency assistance alarms.
- An optional link between the console and the fire detection system prevents hoax disabled refuge calls
- Output to isolate local loudspeaker via OCSPRISOL unit

PRODUCT CODES:

- OCBARG - Green remote
- OCBARG-BZ - Green bezel


Maintenance Service Contracts Available:

Complimentary Maintenance Log Book Available:

EVC System Maintenance Log Book

SPECIFICATIONS:

Advanced Refuge Remote	
Product code	OCBARG
Power supply	15-36V
Power consumption	70mA @ 24V
Humidity range	0-90% non-condensing
Temperature range	-5°C to +40°C
Indicators	Status
Finish	RAL 6024
Dimensions mm W x H x D	134 x 134 x 64
Bezel dimensions mm W x H	154 x 154
Bezel cutout mm W x H	136 x 136
Knockouts/cable entry points	20 mm and 25 mm

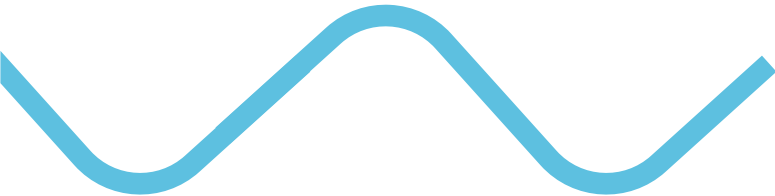

BALDWIN BOXALL
LEADING THE WAY TO SAFETY

Baldwin Boxall Communications Ltd
Wealden Industrial Estate, Farningham Road,
Crowborough, East Sussex, TN6 2JR, United Kingdom
T: +44 (0) 1892 664422
E: hello@baldwinboxall.co.uk
W: www.baldwinboxall.co.uk