



VOICE ALARM PAGING STATION

VIGIL *Unitouch*



Unitouch touchscreen PC paging technology allows simple intuitive control of an EVAS voice alarm system. By touching the relevant part of the screen the operator can access fire microphones, page any/all zones, select and broadcast background music.

FEATURES:

- Each system is bespoke, designed specifically for the system it is intended. There are two screen display options: 'button' or 'graphic layout' view.
- All screens are menu-driven - enabling the user to quickly understand how to use the many features and operate the system.
- 'Administrator' and 'guest' accounts as standard. Further accounts with user rights can be added.
- The 'administrator' (and any user with the appropriate access rights) is able to:

Select individual zones or groups.

Live broadcast/paging.

Broadcast emergency messages stored on EVAS routers.

Broadcast DVA (.wav) files stored on PC.

Route background music.

Initiate weekly fire alarm test.

- User activity is logged, complete with time and date stamp.
- System fault/busy indicators.
- Fault diagnostics - with time and date stamp - can be emailed with added notes (ie 'engineer called out'). Faults displayed include line (A/B circuit), reserve amplifiers, power supply and charger, ambient noise sensors, messages, fire microphones, paging microphones. The system will also display recommended solution(s).

- State-of-the-art high performance computer and screen all in one unit.
- High definition LCD display with fingertip touch sensitivity.
- Wireless keyboard and mouse.
- Supplied with a slide stand for stability and best viewing angle. Adjustable tilt angle between 10 and 40 degrees from vertical.
- Security lock slot (lock not supplied).

TOUCHSCREEN OPTIONS/ACCESSORIES:


PCTSS	Standard software with button layout
PCTSG	Software with graphic layout design
BDM400TS	Desk microphone for touchscreen system
PCTSS	Remote dial diagnostic software
PCTUPS	UPS power supply for PCTS

CABLE REQUIREMENTS:

Two core screened 1.5mm fire rated - two are required (one for data and one for line out audio port). Each unit is supplied with a cable termination box.

PLEASE NOTE: THE CD/DVD DRIVE, MEMORY CARD READER, BUILT-IN MICROPHONE AND POWER BUTTON ARE DISABLED TO PREVENT ACCIDENTAL SHUT DOWN OR CORRUPTION BY UPLOADING SOFTWARE, ETC.

THE SYSTEM CAN ONLY BE SHUT DOWN BY USE OF A PASSWORD.

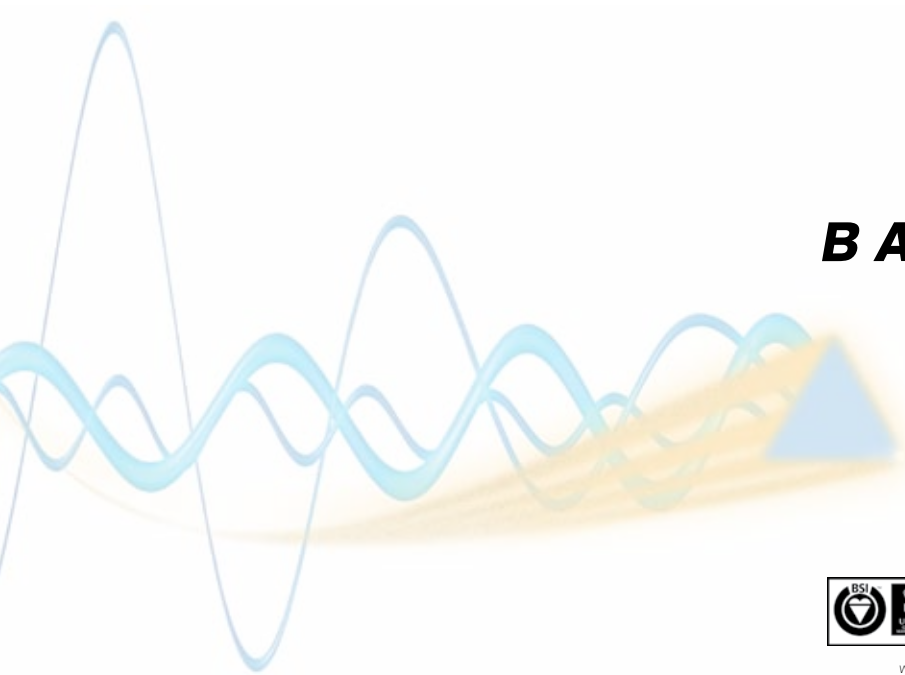

BALDWIN BOX▲LL

TEL: +44 (0) 1892 664422
FAX: +44 (0) 1892 663146

EMAIL: MAIL@BALDWINBOXALL.CO.UK
WEB: WWW.BALDWINBOXALL.CO.UK

BALDWIN BOXALL COMMUNICATIONS LTD
WEALDEN INDUSTRIAL ESTATE,
FARNINGHAM ROAD, CROWBOROUGH,
EAST SUSSEX, TN6 2JR, UNITED KINGDOM.



WE RESERVE THE RIGHT TO CHANGE THE PRODUCT SPECIFICATION WITHOUT PRIOR NOTICE OR LIABILITY. DOC NO: 1.0018.02.10