Emergency Assistance/ Toilet Alarm Controller

Compliant to BS8300-2:2018

The 4-way toilet alarm control panel (the DTA4) is the latest addition to our DTAKIT range of products.

Simply connect the new panel to up to four assistance/toilet alarm kits for an easy to operate alarm system.

A stylish product with a full range of functions, including fault monitoring.

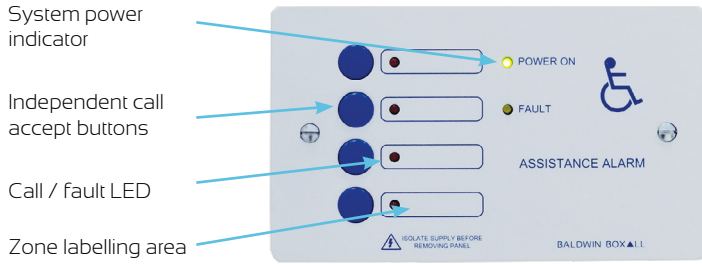**Watch a video review of the DTA4 & DTAKIT.** →

CONTROL PANEL:

- Simply connect to up to four emergency assistance/ toilet alarm kits (see right) for a fully compliant - and monitored - assistance alarm system.

- Panels can be daisy-chained to add more alarm kits from one mains connection.

- The controller features both visual and audible indications of an incoming call.

- Each alarm point is clearly indicated on the panel, with space for the user to add individual zone labelling.

- The panel has four 'call acknowledge' buttons and incoming call LEDs - one for each alarm point connected.

- When the relevant 'call acknowledge' button is pressed on the panel, the caller will notice audible and visual changes to the alarm indicators, thus providing reassurance that help is on the way.

- In addition, the system has a programmable alarm 're-sound' feature. This will operate if a call has been acknowledged at the control unit, but is not reset at the point of call within the specified time.

- A separate relay output enables connection to an external beacon - allowing the opportunity to add a remote indicator to alert staff in a different area.

- The unit has a built-in mains power supply and an LED to confirm that the system is powered and available for use.

- The system is monitored and will indicate a short or open circuit condition. The display will also show which alarm point is at fault.

- As with all our toilet alarm products, the control unit is available with a white or stainless steel finish.

- For ease of installation, the panel fits into a standard double gang back box (not supplied).

- Compatible with all DTAKIT assistance call options, including the IP65 rated products.

DTAKIT PRODUCTS & CODES:

4-way Controller	White	Stainless Steel
Control panel	DTA4	DTA4S

Toilet Alarm Kit	White	Stainless Steel
3 part kit	DTAKIT	DTASKIT
Ceiling pull	DTACP	DTASCP
Over-door light	DTAODL	DTASODL
Reset point	DTARP	DTASRP
WC door sign label	DTALAB	

Assistance Call	White	Stainless Steel
Call button	DTACB	DTASCB
Call button + reset button	DTACBRP	DTASCBRP
Wall mount pull cord	DTACPW	DTASCPW
Call button + 6.35mm jack	DTACBJ	DTASCBJ

IP65 Rated		
Pull cord	DTACPM	
Call button	DTACBM	
Reset button	DTARPM	
Call & reset point	DTACBRPM	

BALDWIN BOX▲LL
LEADING THE WAY TO SAFETY

KEY FEATURES:

System power indicator

Independent call accept buttons

Call / fault LED

Zone labelling area

POWER ON

FAULT

ASSISTANCE ALARM

⚠ ISOLATE SUPPLY BEFORE REMOVING PANEL

BALDWIN BOXALL
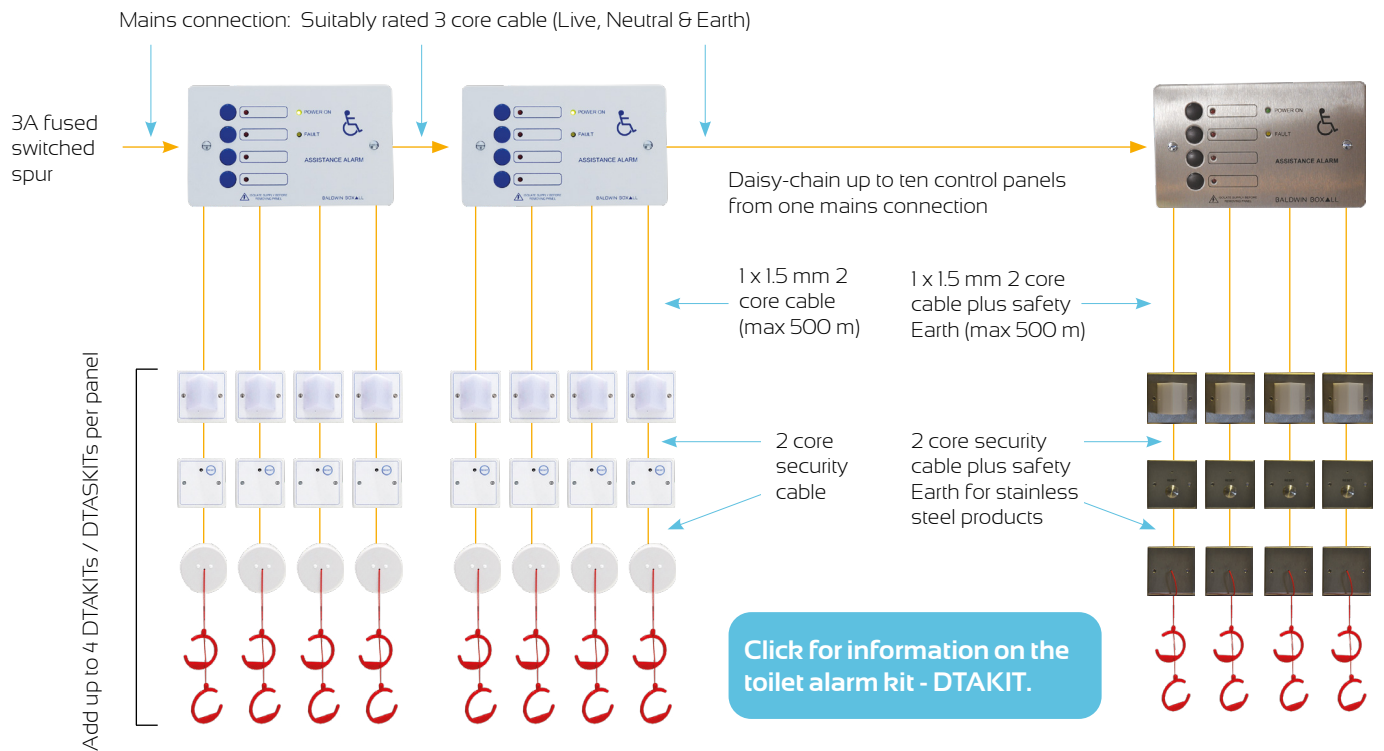
» Monitored system with fault LED to indicate if a 'short' or 'open' circuit condition is detected.

» 'Call acknowledge' feature reassures the caller that help is on the way (both audible & visual alarms change at point of call when acknowledge button is pressed).

» Only a single mains connection is required - direct to the panel - no additional power source is needed.

» Fully BS8300-2:2018 compliant

Dmensions: 146 mm (W) x 3 mm (D) 86 mm (H).
(Requires a 35 mm double gang back box).
Weight: 0.32 kg.
White RAL9016 / stainless steel grade 304

CABLING & CONNECTIONS:

Mains connection: Suitably rated 3 core cable (Live, Neutral & Earth)

3A fused switched spur

Daisy-chain up to ten control panels from one mains connection

1 x 1.5 mm 2 core cable (max 500 m)

1 x 1.5 mm 2 core cable plus safety Earth (max 500 m)

Add up to 4 DTAKITs / DTASKITs per panel

2 core security cable

2 core security cable plus safety Earth for stainless steel products

Click for information on the toilet alarm kit - DTAKIT.

Download Cabling Information

BALDWIN BOXALL
LEADING THE WAY TO SAFETY